



Shaft Direction

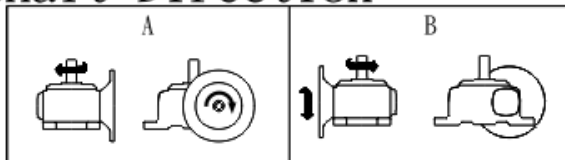

Unit:mm

Size	Ratio	A	AB	AC	AD	B	BB	BC	C	CA	CB	CC	CD	CE	Z	Input Bore		
																U	T	V
50	1/10	214	140	90	116	145	95	50	236	50	93	102	220	18	11	11	4	12.8
60		177	97	100	126	165	110	55	263	60	105	120	260	20	11	11	4	12.8
70	1/15	213	118	120	156	195	130	65	290	70	120	135	295	20	15	14	5	16
80		215	120	120	156	195	130	65	310	70	120	135	295	20	15	19	6	21.8
100	1/30	273	140	190	226	260	170	90	375	100	155	180	375	30	15	24	8	27.3
120		278	142	190	226	260	170	90	400	100	155	180	375	30	15	28	8	31.3
135	1/40	370	195	260	306	320	210	110	495	135	210	235	495	30	18	28	8	31.3
155		378	218	260	306	320	210	110	520	135	210	235	495	30	18	38	10	41.3
175	1/60	430	236	290	336	382	242	140	521	155	145	265	456	30	20	38	10	41.3
175		465	255	320	376	398	248	150	577	175	167	293	516	35	20	42	12	45.3

Size	Output Shaft			Flange					HP	Ojm (l)	Weight (kg)
	LS	S	W * X	LA	LB	LC	LE	Z1			
50	40	17	5 * 3	130	110	160	4	M8	1/4 1/2	0.4	6.5
60	50	22	7 * 4	130	110	160	4	M8	1/4 1/2	0.6	9
70	60	28	7 * 4	130 165	110 130	160 210	4 5	M8 M10	1/2 1	1.1	13
80	65	32	10 * 4.5	165	130	200	5	M10	1/2	1.5	18
100	75	38	10 * 4.5	165 215	130 180	200 250	5	M10 M12	2 3	3.0	42
120	85	45	12 * 4.5	215	180	250	5	M10	3 5	5.0	66
135	95	55	15 * 5	215 265	180 230	250 300	5	M12 15	5 7.5	7.5	90
155	100	60	15 * 5	265	230	300	4.5	15	7.5 10	9.2	115
175	110	65	8 * 16	265 300	230 250	300 350	5 6	M12 19	10 15	10.5	155



INPUT-BORE VIEW